

SG-48TG4D 440-460W

N-type TOPCon Solar Double Glass Bifacial Module
Maximum Efficiency 23.0%




Quality Certification

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



Product Warranty

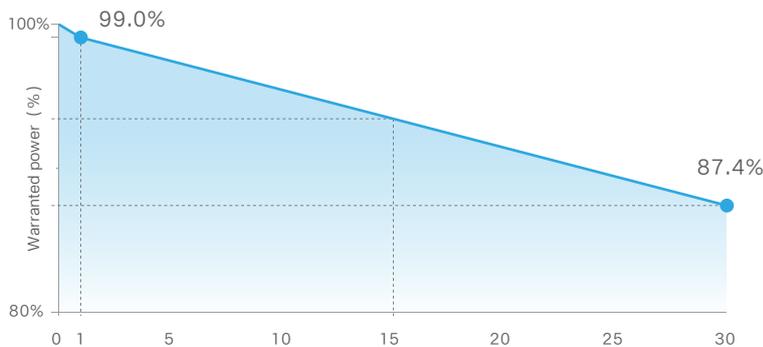

25 Year

Warranty for Materials and Processing

30 Year

Warranty for Extra Linear Power Output

First Year Power Degradation <1%

Year 2-30 Power Degradation <0.4%

Product Performance



Superior Low Irradiation Performance

Higher power output in the morning and evening, cloudy days, haze and other low-light scenarios



Smaller Size

A lightweight design for convenient transportation and installation



Higher Bifacial Factor

The rear power output and generation capacity are 20% and 3.5% higher than P-type, respectively



Superior Temperature Coefficient

Generating 1%-2% more power than P-type modules in high temperature regions



Anti-PID Guarantee


Minimizes the chance of degradation caused by PID phenomena through optimization of cell production technology and material control




Superior Mechanical Load Capacity

Heavy snow load up to 5400 Pa
wind load up to 2400 Pa

Engineering Drawings

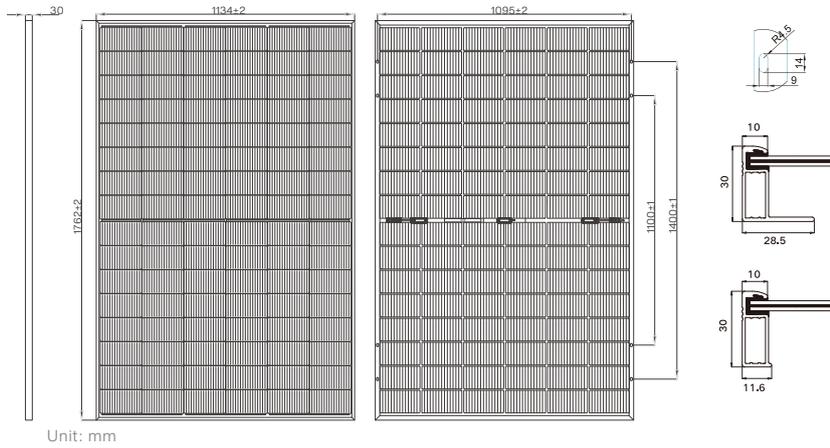

I-V and P-V Curves

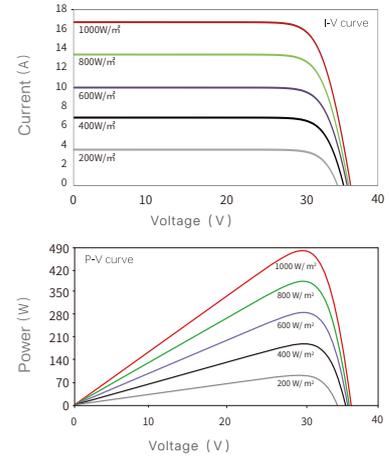

Specifications (STC)

Maximum Power P _{max} (W)	440	445	450	455	460
Voltage at Maximum Power (V _{mp} /V)	29.59	29.86	30.13	30.40	30.67
Current at Maximum Power (I _{mp} /A)	14.88	14.91	14.94	14.97	15.00
Open Circuit Voltage (V _{oc} /V)	35.47	35.64	35.81	35.98	36.15
Short Circuit Current (I _{sc} /A)	15.78	15.81	15.84	15.87	15.90
Module Efficiency (%)	22.0	22.3	22.5	22.8	23.0
Power Tolerance	0~+3%		Maximum System Voltage	DC1500V	
Maximum Series Fuse Rating	30A		Operating Temperature	-40°C~+70°C	
Bifacial Factor	80±5%				

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Specifications (BNPI)

Maximum Power P _{max} (W)	484	490	495	501	506
Voltage at Maximum Power (V _{mp} /V)	29.59	29.86	30.13	30.40	30.67
Current at Maximum Power (I _{mp} /A)	16.37	16.40	16.43	16.47	16.50
Open Circuit Voltage (V _{oc} /V)	35.47	35.64	35.81	35.98	36.15
Short Circuit Current (I _{sc} /A)	17.36	17.39	17.42	17.46	17.49

BNPI: Irradiance Front 1000W/m², Rear 135W/m², Cell Temperature 25°C, AM=1.5

Mechanical Characteristics

Cell Type	N- type mono-crystalline
Cell Orientation	96 (2 x 48)
Dimension	1762 x 1134 x 30mm
Weight	24.3kg
Glass	Dual glass, 2.0mm+2.0mm semi-tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68 rated
Output Cables	4mm ² , (+): 1200mm, (-): 1200mm or customized length
Connector Type	MC4-EVO2A/others
Mechanical Load	5400Pa (Front side) /2400Pa (Rear side)

Temperature Characteristics

Temperature Coefficients of P _{max}	-0.29%/°C
Temperature Coefficients of V _{oc}	-0.25%/°C
Temperature Coefficients of I _{sc}	0.045%/°C

Packaging Configuration

Packing Detail	36 pcs/pallets, 72 pcs/stack, 936 pcs/ 40'HQ container
----------------	--

SUNGROW

Sungrow Renewables

NO.2, Tianhu Road, High-tech Industry, Development Zone, Hefei, P.R. China

modulesales@sungrowpower.com www.sungrowplant.com

*Specifications included in this datasheet are subject to change without notice. Sungrow Renewables reserves the right of final interpretation.